


10390400	DATA SHEET	
Valid from: 17.09.2018	EPIC[®] MCS 2 SS / MCS 2 BS PROFIBUS DP	

Description

- The mixed assembly guarantees high flexibility. For applications in mechanical and plant engineering, for printing machines and slide-in technology.
- Uninterruptible fieldbus operation when pulling the connector
- Transmission rate up to 12 MBit/s
- Easy assembly by screw connection
- Shielding connection by strain relief



Artikel No.	Module	VPE
10390400	Male	10
10390500	Female	10

General Characteristics

Series	MC Module
Number of Contacts	2 / 4 + shield
Termination Methods	Screw termination: for Profibus cable
Temperature Range	-20°C to +85°C


Mechanical Characteristics

Cycles of mechanical operation	100
--------------------------------	-----

Electrical Characteristics

Rated Voltage	30 V
Rated Current	1 A
Pollution Degree	3


Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB10390400EN Version: 02	Page 1 of 2
---	---------------------------------------	-------------

10390400	DATA SHEET	
Valid from: 17.09.2018	EPIC® MCS 2 SS / MCS 2 BS PROFIBUS DP	


Technical Drawing



M

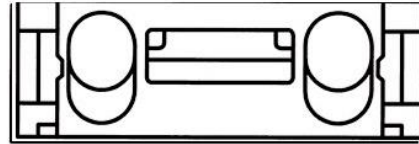

F

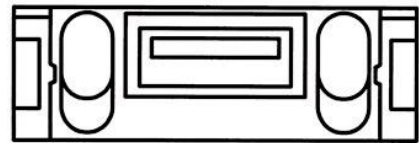

Automation



Industrial machinery and plant engineering



Wind Energy

Info

Profibus DP module for uninterruptible fieldbus operation

Application range

Plant engineering
Light & sound technology
Control engineering

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB10390400EN Version: 02	Page 2 of 2
---	---------------------------------------	-------------